



STANDARD SHEATH

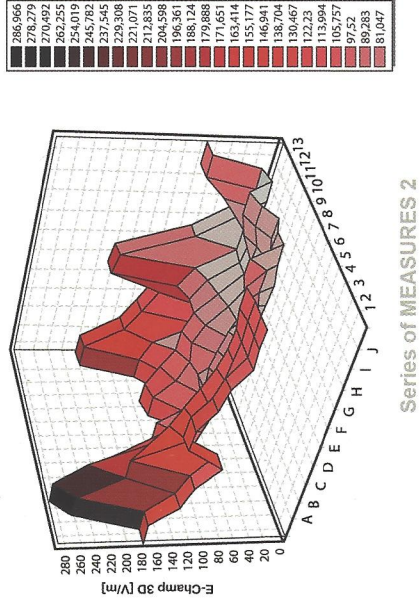

Series of MEASURES 2
STANDARD sheath, positioned along axis E
Axis A-I (40cm), 5cm/square, axis 1-11 (100cm), 20 cm/square

- With a standard sheath the 50Hz electric field varies from 70 up to more than 700 V/m.
- With the Flex-a-ray sheath, the electric field is reduced by more than 97% (performance comparable to that of a screened wire)

FLEX-A-RAY ANTI-RADIATION SHEATH

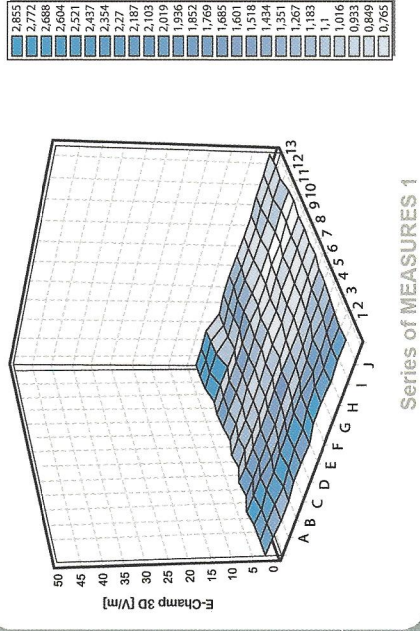

Serie de MEASURES 1
Gaine SPECIALE ANTI-RAYONNEMENT, disposée suivant l'axe E
Axis A-I (40cm), 5cm/square, axis 1-11 (100cm), 20 cm/square

Product	∅	code	Length
Blue-coloured Flex-a-ray	16	13101140	100M
Blue-coloured Flex-a-ray	20	13101540	100M
Blue-coloured Flex-a-ray	25	13101940	100M

Easy and quick installation

